

SCREW PARTS NO.

| | | | | | |
|-----------------------|-------------|------------------------|-------------|-----------------------|-------------|
| M3 x 4 pan head screw | N30-3004-46 | M3 x 14 pan head screw | N30-3014-46 | M4 x 6 pan head screw | N30-4006-46 |
| M3 x 6 pan head screw | N30-3006-46 | M3 x 25 pan head screw | N30-3025-46 | 5φ E washer | N24-3050-60 |






| Fig. No. | Parts No. | Description | Remarks |
|----------|--------------------|---------------------------------|---------|
| 1 | J91-0083-05 | Tonearm ass'y | 1B |
| 2 | J91-0084-05 | Tonearm | 2B |
| 3 | D91-0044-05 | Weight ass'y | 1B |
| 4 | D91-0045-05 | Bias weight | 1B |
| 5 | J91-0483-05 | Bias rod | 1B |
| 6 | D39-0047-05 | Tonearm support ass'y | 2B |
| 7 | N73-2604-41 | Screw | 2B |
| 8 | D21-0407-05 | Elevation shaft ass'y | 2B |
| 9 | D21-0408-05 | Elevation shaft | 2B |
| 10 | G01-0333-05 | Compression spring | 2B |
| 11 | N19-0273-05 | Flat head washer | 2B |
| 12 | N19-0269-05 | Flat head washer | 2B |
| 13 | N14-0112-05 | Adjusting nut | 2B |
| 14 | — | — | — |
| 15 | J92-0021-05 | Shell ass'y | 2B |
| 16 | Destinations' list | Cartridge | 2B |
| 17 | Destinations' list | Cartridge mounting screw | 2B |
| 18 | N19-0267-05 | Nylon washer | 1B |
| 19 | N09-0271-04 | Bolt | 1B |
| 20 | A53-0021-02 | Turntable cover | 1B |
| 21 | J50-0087-05 | Hinge (A) | 1B |
| 22 | N33-4008-45 | Round head flat screw | 1B |
| 23 | A40-0150-02 | Bottom board | 3A |
| 24 | J02-0079-04 | Leg | 3A |
| 25 | N09-0264-04 | Special screw | 3A |
| 26 | N09-0171-04 | Tap tight screw | 3A,3B |
| 27 | A03-0202-01 | Turntable case ass'y | 3B |
| 28 | J50-0080-05 | Hinge (B) | 3B |
| 29 | N61-3113-45 | Round head wood screw | 3B |
| 30 | D12-0078-04 | Operating lever ass'y | 2A,2B |
| 31 | G02-0070-04 | Plate spring | 2A,2B |
| 32 | Destination's list | Dress panel (A) | 2B |
| 33 | B03-0114-04 | Dress panel (B) | 2A |
| 34 | D39-0049-04 | Tonearm rest | 2B |
| 35 | J21-1486-04 | L shaped hardware | 2A,2B |
| 36 | N87-3006-45 | Tap tight screw | 1A,1B |
| 37 | D10-0223-04 | Speed selector lever ass'y | 2A |
| 38 | D10-0225-04 | Speed selector guide | 2A |
| 39 | N87-3006-45 | Tap tight screw | 3A |
| 40 | D10-0226-04 | Elevation bar ass'y | 2B |
| 41 | D23-0140-04 | Turntable bearing ass'y | 2A |
| 42 | N14-0048-14 | Nut | 2A |
| 43 | N19-0142-04 | Flat head washer | 2A |
| 44 | T41-0103-05 | Motor | 2A |
| 45 | G13-0105-04 | Rubber cushion | 2A |
| 46 | N19-0186-14 | Flat head washer | 2A |
| 47 | Destinations' list | Motor pulley | 1A |
| 48 | G01-0351-04 | Conical spring (A) | 2A |
| 49 | G01-0336-04 | Conical spring (B) | 2A,2B |
| 50 | G11-0050-04 | Cushion | 2A,2B |
| 51 | Destinations' list | Power cord | 3B |
| 52 | Destinations' list | Cord stopper | 3A |
| 53 | Destinations' list | Cord bushing | 3B |
| 54 | J41-0017-05 | Cord bushing | 3B |
| 55 | E30-0419-15 | Audio cable | 3B |
| 56 | J19-0492-04 | Cable stopper | 3B |
| 57 | D02-0017-05 | Turntable platter | 1B |
| 58 | G16-0054-13 | Turntable sheet | 1B |
| 59 | D16-0057-03 | Drive belt | 1A |
| 60 | N15-1040-46 | Flat head washer | 2A |
| 61 | B59-0020-04 | Transporting screw caution card | 2A |
| 62 | W01-0057-04 | EP adapter | 2A |

| Fig. No. | Parts No. | Description | Remarks |
|----------|--------------------|--------------------------|---------|
| 63 | Destinations' list | Micro switch | 3B |
| 64 | Destinations' list | Insulating screw | 2B |
| 65 | J19-0306-05 | Lead crammer | 2A,2B |
| 66 | E23-0083-05 | Terminal lug | 2A |
| 67 | G01-0336-04 | Nylon crammer | 2A |
| 68 | — | — | — |
| 69 | D39-0041-05 | PC board stud | 2A |
| 70 | E22-0416-05 | Lug type terminal strips | 2B |
| 71 | N87-3006-45 | Tap tight screw | 3B |
| 72 | Destinations' list | Power supply unit | 2A |
| 73 | Destinations' list | Turntable case badge | 3A |
| 74 | J61-0054-05 | Vinyl tie | 3B |
| 75 | J69-0019-04 | Tape | 1A |
| 76 | Destinations' list | Slide switch | 2A |
| 77 | Destinations' list | Switch stopper | 2A |

POWER SUPPLY (X27-1070-01, 02-, -04)

| Ref. No. | Parts No. | Description | Remarks |
|----------------------|----------------|---|---------|
| CAPACITOR | | | |
| C1 | C90-0305-15 | Metal film 0.1μF 125WV (X27-1070-01) | |
| C1 | CK45E3D103-PMU | Ceramic 0.01μF 2000WV (X27-1070-02) | |
| C1.2 | CK45E3D103-PMU | Ceramic 0.01μF 2000WV (X27-1070-04) | |
| RESISTOR | | | |
| R1 | RC05GF2H120K | Carbon 12Ω ±10% 1/2W (X27-1070-01, -02) | |
| R1.2 | RC05GF2H120K | Carbon 12Ω ±10% 1/2W (X27-1070-04) | |
| MISCELLANEOUS | | | |
| — | F09-0033-05 | Capacitor cap (X27-1070-02) | |

| Fig. No. | U.S.A. (K) | Canada (P) | PX (U) | Australia (X) | Europe (W) | Scandinavia (L) | England (T) | South Africa (S) | Other area (M) | Description |
|----------|-------------|-------------|-------------|---------------|-------------|-----------------|-------------|------------------|----------------|---------------------------------------|
| — | A20-1029-01 | A20-1029-01 | A20-1067-01 | A20-1029-01 | A20-1067-01 | A20-1029-01 | A20-1029-01 | A20-1029-01 | A20-1067-01 | Panel |
| — | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | B23-0004-04 | Overhang gauge |
| — | B40-1337-03 | B40-1337-03 | B40-1382-03 | B40-1384-03 | B40-1383-03 | B40-1381-03 | B40-1380-03 | B40-1384-03 | B40-1382-03 | Model name plate |
| 32 | B03-0113-04 | B03-0113-04 | B03-0113-04 | B03-0113-04 | B03-0113-04 | B03-0113-04 | B03-0119-04 | B03-0113-04 | B03-0113-04 | Dress panel (A) |
| 73 | B43-0161-04 | B43-0161-04 | B43-0161-04 | B43-0161-04 | B43-0161-04 | B43-0161-04 | B43-0160-04 | B43-0161-04 | B43-0161-04 | Turntable case badge |
| — | B42-0560-04 | B42-0560-04 | — | — | — | — | — | — | — | Caution sticker |
| — | B42-0612-04 | — | — | — | — | — | — | — | — | Quality indication sticker |
| — | B50-1476-00 | B50-1476-00 | B50-1476-00 | B50-1476-00 | B50-1476-00 | B50-1476-00 | B50-1530-00 | B50-1476-00 | B50-1476-00 | Instruction Manual |
| — | B46-0056-00 | B46-1055-10 | B46-0050-00 | — | — | — | — | — | — | Warranty card |
| — | — | — | B46-0051-00 | — | — | — | — | — | — | Power voltage selector caution card |
| — | — | — | B58-0144-00 | — | — | — | — | — | — | Power supply caution card |
| — | — | — | B58-0139-00 | — | — | — | — | — | — | KENWOOD service stations' list |
| — | — | — | B59-0018-00 | — | — | — | — | — | — | Power cord caution card |
| — | — | — | — | — | — | — | B58-0214-04 | — | — | Carton case caution card |
| — | B58-0043-00 | B58-0043-00 | — | — | — | — | — | — | — | — |
| 77 | — | — | D32-0080-04 | — | D32-0080-04 | — | — | — | D32-0080-04 | Switch stopper (power voltage) |
| 47 | — | — | D15-0162-04 | D15-0162-04 | D15-0162-04 | D15-0162-04 | D15-0162-04 | D15-0162-04 | D15-0162-04 | Motor pulley (50Hz) |
| 47 | D15-0163-04 | D15-0163-04 | D15-0163-04 | — | D15-0163-04 | — | — | — | D15-0163-04 | Motor pulley (60Hz) |
| 51 | E30-0181-05 | E30-0181-05 | E30-0545-05 | E30-0185-05 | E30-0459-05 | E30-0292-05 | 040-0304-05 | 040-0304-05 | E30-0545-05 | Power cord |
| — | H01-1580-04 | H01-1580-04 | H01-1580-04 | H01-1580-04 | H01-1580-04 | H01-1580-04 | H01-1581-04 | H01-1580-04 | H01-1580-04 | Carton case |
| — | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | H10-1458-03 | Polystyrene foamed fixture |
| — | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | H12-0030-04 | Buffer fixture (A) |
| — | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | H12-0031-03 | Buffer fixture (B) |
| — | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | H12-0032-04 | Buffer fixture (C) |
| — | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | H12-0033-04 | Carton board |
| — | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | H20-0382-04 | Polyethylene cover |
| — | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | H25-0016-00 | Polyethylene bag x 2 (shell, weight) |
| — | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | H25-0029-04 | Polyethylene bag (oilier and adapter) |
| — | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | H25-0078-00 | Polyethylene bag (oilier and adapter) |
| — | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | H39-0015-05 | Curl stopper |
| 52 | J19-0484-04 | J19-0484-04 | J19-0492-04 | J19-0492-04 | J19-0492-04 | J19-0492-04 | J19-0492-04 | J19-0492-04 | J19-0484-04 | Cord stopper |
| 53 | J41-0034-05 | J41-0034-05 | J41-0024-05 | J41-0024-05 | J41-0017-05 | J41-0017-05 | J41-0024-05 | J41-0024-05 | J41-0034-05 | Cord bushing |
| — | — | — | — | — | J61-0014-05 | J61-0014-05 | J61-0014-05 | J61-0014-05 | — | Free-up belt |
| 17 | N09-0250-05 | — | — | — | — | — | — | — | — | Cartridge mounting screw x 2 |
| 17 | N09-0251-05 | — | N09-0265-05 | N09-0265-05 | N09-0265-05 | N09-0265-05 | N09-0265-05 | N09-0265-05 | N09-0265-05 | Cartridge mounting screw x 2 |
| 64 | N09-0195-04 | N09-0195-04 | N09-0195-04 | N09-0195-04 | N09-0195-05 | N09-0195-05 | N09-0275-04 | N09-0195-04 | N09-0195-04 | Insulating screw |
| 63 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | S50-1017-05 | Micro switch |
| 76 | — | — | S31-2001-05 | — | S31-2001-05 | — | — | — | S31-2001-05 | Slide switch (power voltage selector) |
| 16 | — | T21-0053-05 | T21-0051-05 | T21-0051-05 | T21-0051-05 | T21-0051-05 | T21-0051-05 | T21-0051-05 | T21-0051-05 | Cartridge |
| — | — | — | W01-0035-05 | — | W01-0035-05 | — | — | — | W01-0035-05 | Small screw driver |
| — | X27-1070-01 | X27-1070-02 | X27-1070-02 | X27-1070-02 | X27-1070-02 | X27-1070-02 | X27-1070-04 | X27-1070-02 | X27-1070-02 | Power supply unit |

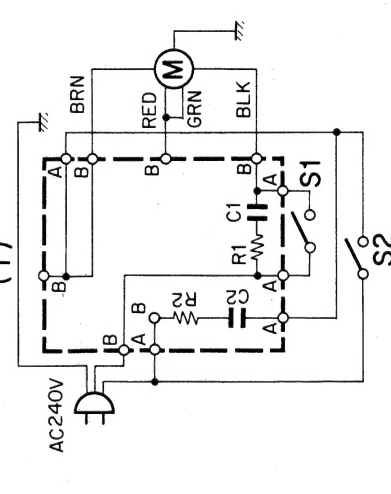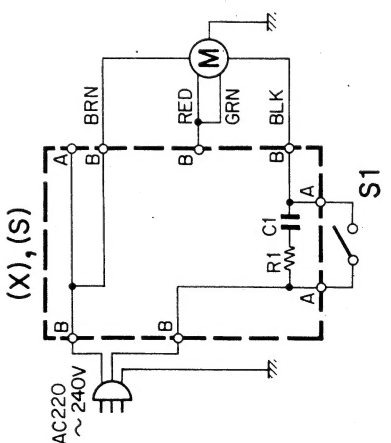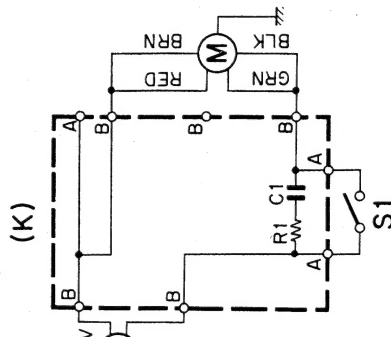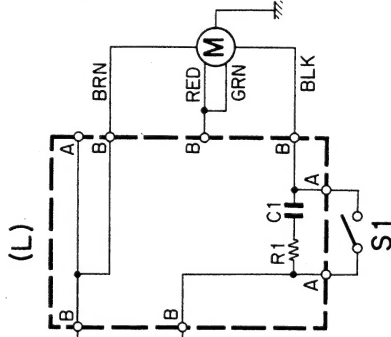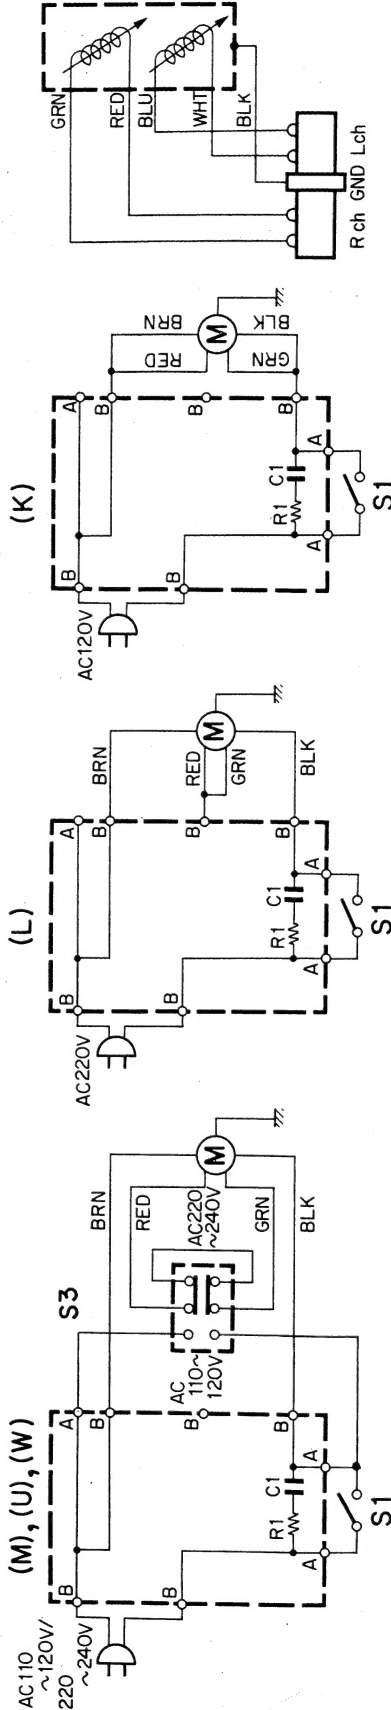

| | R1,2 | C1,2 | POWER SUPPLY UNIT |
|------------------|----------|---------------|-------------------|
| USA (K) | 12Ω 1/2W | 0.1μF 125WV | X27-1070-01 |
| OTHER AREAS (M) | " | 0.01μF 2000WV | X27-1070-02 |
| PX (U) | " | " | " |
| EUROPE (W) | " | " | " |
| ENGLAND (T) | " | " | " |
| SOUTH AFRICA (S) | " | " | X27-1070-04 |
| SCANDINAVIA (L) | " | " | X27-1070-02 |

M : MOTOR
S1,2 : MICRO SW.
S3 : SLIDE SW.